

# SBM

## STO Separator de grasimi cu decantor


Debit: 1,5 – 20 l/s

### Echipament:

- camera decantare
- camera separare
- ventilatie

### Echipament optional:

- extensii
- alarma
- capac carosabil

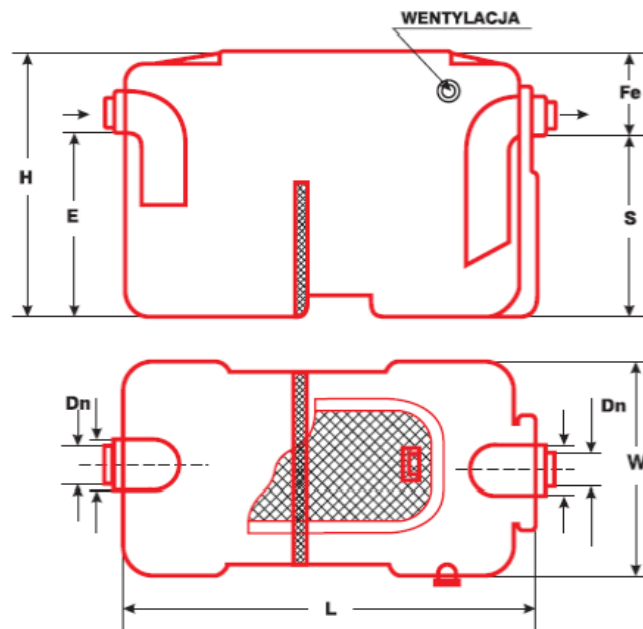

MODEL	Debit	Volum total	Volum camera separare	Volum grasimi depozitate	Volum camera decantare	Volum namol depozitat	L	W	H	Dn	E/S	Greutate	Extensii
M.U. STO 1	l/s 1,5	1 920	1 150	1 98	1 150	1 98	mm 1470	mm 980	mm 1090	mm 110	mm 740/ 710	kg 60	Type A
STO 2	2	920	200	130	200	130	1470	980	1090	110	740/ 710	65	A
STO 3	3	920	300	195	300	195	1470	980	1090	110	740/ 710	70	A
STO 6	6	1682	600	390	600	390	1986	1035	1040	160	715/ 690	100	B
STO 8	8	1840	800	520	800	520	2860	980	1090	160	720/ 690	120	A
STO 10	10	2760	1000	650	1000	650	4250	980	1090	160	720/ 690	180	A
STO 15	15	3364	1500	975	1500	975	3892	1035	1040	200	740/ 660	200	B
STO 20	20	5046	2000	1300	2000	1300	5838	1035	1040	200	740/ 660	300	B